

ArChine Refritech HPE 170

Description

ArChine Refritech HPE 170 is proprietary blend of premium Polyol Ester technology base fluid and additives. This lubricant is formulated to provide superior protection for HFC refrigeration systems. ArChine Refritech HPE 170 offers exceptional solubility and superior lubricity in HFC and Blended Refrigerants.

ArChine Refritech HPE 170 has exceptional chemical and thermal stability, and offers a very long service life.

Benefits

- Excellent low temperature fluidity
- Optimized solubility
- Excellent film strength and anti-wear properties
- Very high flash point for added safety
- Enhanced carbon and varnish control to help reduce deposits
- Very low volatility
- Excellent corrosion and rust control
- Enhanced resistance against water contamination

Typical Properties

ArChine Refritech HPE	ISO 170
Appearance	Light yellow transparent liquid
Density@ 20°C, g/cm ³	0.959
Viscosity (cSt) @ 40°C	178.88
Viscosity (cSt) @ 100°C	15.73
Viscosity Index	89
Flash Point °C	278

Distributor Wanted

Shanghai PingYiao Trading CO., Ltd.

Tel: 86-21-64705533

Address: A1207, Yin Hai Building, No.250, Caoxi Road, Xuhui District, Shanghai
200235 P.R.China

Telephone helpline: (86)15900706965

Fax: 86-21-64705533-209

Website: www.pingyiao.com


E-mail: info@pingyiao.com

ARCHINE

Shanghai PingYiao Trading CO., Ltd.

Fire Point °C	304
Pour Point °C	-24
Copper Corrosion, 3 hr	1
Foam Characteristic, 24°C	15/0

* The above data is typical data, not as product specifications.

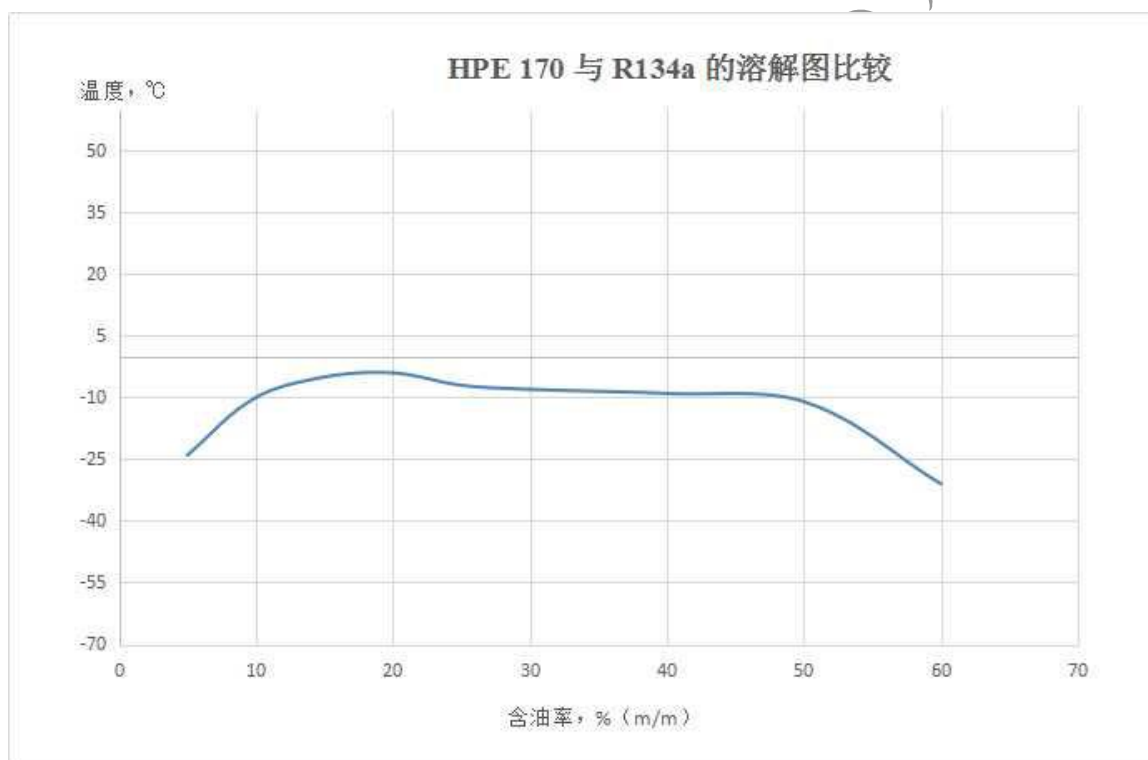

Distributor Wanted

Shanghai PingYiao Trading CO., Ltd.

Address: A1207, Yin Hai Building, No.250, Caoxi Road, Xuhui District, Shanghai
200235 P.R.China

Telephone helpline: (86)15900706965

Website: www.pingyiao.com

Tel: 86-21-64705533

Fax: 86-21-64705533-209

E-mail: info@pingyiao.com